

WL 2500



POINT OF USE WATER SOLUTION QUALITY AND CONVENIENCE



Tabletop model
Dimensions:
W 34,5 cm _ H 48,5 cm _ D 36,5 cm



Freestanding model
Dimensions:
W 34,5 cm _ H 102 cm _ D 36,5 cm



NSF/ANSI
Standard 61



QUALITY & SAFETY
GUARANTEED

Waterlogic International Limited reserves the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo are registered trademarks in countries where the Group operates.

Waterlogic International Limited is licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.

WL 2500



MULTI FILTRATION SYSTEM

CHOICE

Hot and cold
Cold and ambient

HOT WATER TEMPERATURE

87° C

EXTRA HOT FACILITY

Up to 95° C

HIGH CAPACITY OF HOT WATER


1,5 litres stainless steel tank

MULTI FILTRATION SYSTEM


Active carbon filter
and In-tank UV

UV ALARM

Audible alarm inform the end user
if the UV lamp has a fault

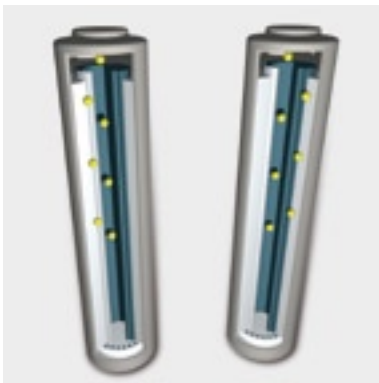

CARBON FILTER

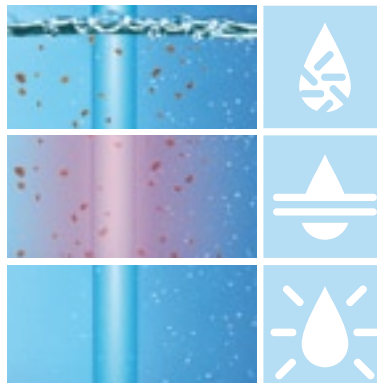


IN TANK-UV

UV light destroys the growth of bacteria
so Hygienic Water is Guaranteed.



NEW: BioCote natural antimicrobial solution added to all plastic parts surrounding the dispensing area inhibiting bacterial growth.



EASY MAINS CONNECTION

WLI Trading Limited

Suite 4, 2nd Floor Beacon Court,
Sandyford, Dublin 18, Ireland
Tel: + 353 1 293 1960
Fax: + 353 1 293 1052
website: www.waterlogic.com
e-mail: exportsales@waterlogic.com

Distributed by: