
borg& overström



Beautifully refreshing.

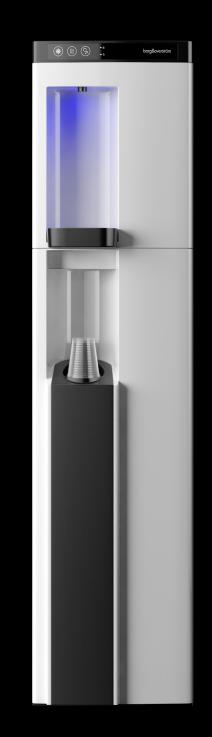

borg& overström

A design for flexibility

Created for versatility, B4 flourishes in all environments – from boardroom to sports hall. Its compact size, large dispense area and flexible water options position it as the premium direct-chill refreshment solution.

Reasons to choose

- Ultra-hygienic touch-sensitive control panel
- Convenient integral cup dispenser
- High capacity dispense area for bottles and jugs
- Sealed, hygienic, direct-chill cooling system
- Floorstanding option comes complete with an internal alarmed waste kit



Beautifully refreshing.



borg& overström




Direct Chill



Floorstanding

Countertop



Available colours











Beautifully refreshing.





Borg & Overström Totality



Driven by a relentless pursuit of excellence, Borg & Overström Totality™ is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Ultra-violet sterilising system For added hygiene confidence, appliances can be fitted with Viovandt™ – an ultra-violet sterilisation process that reduces water-born bacteria.



World-class filtration

For the ultimate drinking experience, Borg & Overström appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.

Beautifully refreshing.



Laboratory certified 99.999% bacteria-free Every Borg & Overström appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-eliminating process, Sterizen™.



Biofilm, limescale and impact resistant epoxy resin panel finish Providing an increased level of hygiene and longevity, Fynil™ is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



borgandoverstrom.com



B4 Models	Silver	White	Black
Direct Chill, Countertop Chilled, Ambient Chilled, Hot, Ambient Chilled, Sparkling Chilled, Hot, Sparkling	103510 103520 103530 103540	103511 103521 103531 103541	103512 103522 103532 103542
Base Cabinet	103590	103591	103592

Power requirements Hertz 50/Volts 220-240 Max power consumption Chilled & Ambient 100W Chilled & Hot 600W Chilled & Sparkling 150W Chilled, Hot & Sparkling 650W

Chilled temperature Min 2°C/Max 11°C Hot temperature Max 92°C Throughput litres per hour Chilled 35/Hot 6



Dimensions

Countertop

Internal

Floorstanding

Dispense height

WxDxH

270mm

320x470x1325mm

320x470x415mm

280x330x830mm









Additions for B4



Printed paper cups Environmentally-friendly disposable cups designed to fit Borg & Överström cup dispensers perfectly.

Deep-sparkle CO² refills Can be disposed via standard steel recycling or general waste. Requires CO² regulator with gauge.



Sanitisation kit



Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



Waste kit overflow sensor Featuring an audible high-water level alarm to prevent the base cabinet waste tank from overflowing. Included as standard on floorstanding models.



Leak detection kit Featuring a moisture sensor that Install appliances simply and shuts the water supply in the unlikely event of a leak.



Install kit with 3M filter effectively in a wide range of applications. Complete with a 3M filter.

Ultra-violet filter kit Complete Viovandt™ filter kit to assist in water purification and removal of unwanted micro-organisms.



Beautifully refreshing.





Book a visit to the Borg & Overström Academy for a personal demonstration of the new B4

Talk to an adviser +44 (0) 1362 695 006 sales@borgandoverstrom.com

